


NAIS

RF (Radio Frequency) Type [2-Channel (Form A) Type] —Low On resistance—

PhotoMOS RELAYS

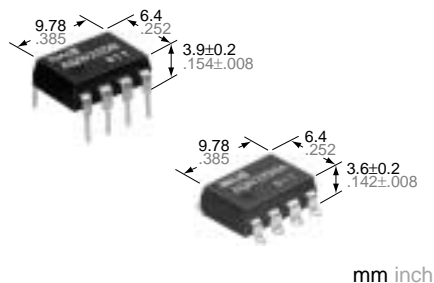

mm inch

FEATURES

- 1. PhotoMOS relay 2-channels (Form A) type with high response speed, low leakage current and low On resistance.**
- 2. Applicable for 2 Form A use as well as two independent 1 Form A use**

3. Compact 8-pin DIP size

The device comes in a compact (W) 6.4x(L) 9.78x(H) 3.9 mm (W) .252x(L) .385x(H) .154 inch, 8-pin DIP size (through hole terminal type).

4. Low capacitance between output terminals ensures high response speed:

The capacitance between output terminals is small, typically 10 pF. This enables for a fast operation speed of 200 μ s.

5. High sensitivity and low On resistance:

Maximum 0.16 A of load current can be controlled with input current of 5 mA (AQW225N). The 10 On resistance is less than our conventional models. With no metallic contacts, the PhotoMOS relay has stable switching characteristics.

6. Low-level off state leakage current:

The SSR has an off state leakage current of several milliamperes, whereas the PhotoMOS relay has only 30 pA even with the rated load voltage of 80 V (AQW225N).

7. Controls low-level analog signals:





PhotoMOS relay features extremely low closed-circuit offset voltages to enable control of small analog signals without distortion.

8. Low terminals electromotive force: (approx. 1 μ V)

TYPICAL APPLICATIONS

- Measuring equipment
- Scanner, IC checker, Board tester

TYPES


Type	Output rating*		Part No.				Packing quantity	
			Through hole terminal	Surface-mount terminal			Tube	Tape and reel
	Load voltage	Load current	Tube packing style	Tape and reel packing style				
				Picked from the 1/2/3-pin side	Picked from the 4/5/6-pin side			
AC/DC type	80 V	120 mA	 AQW225N	 AQW225NA	 AQW225NAX	 AQW225NAZ	1 tube contains 40 pcs. 1 batch contains 400 pcs.	1,000 pcs.
	200 V	50 mA	AQW227N	AQW227NA	AQW227NAX	AQW227NAZ		
	400 V	40 mA	AQW224N	AQW224NA	AQW224NAX	AQW224NAZ		

*Indicate the peak AC and DC values.

Note: For space reasons, the package type indicator "X" and "Z" are omitted from the seal.

RATING

1. Absolute maximum ratings (Ambient temperature: 25°C 77°F)


Item	Symbol	 AQW225N(A)	AQW227N(A)	AQW224N(A)	Remarks	
Input	LED forward current	I_F	50 mA			
	LED reverse voltage	V_R	3 V			
	Peak forward current	I_{FP}	1 A			f = 100 Hz, Duty factor = 0.1%
	Power dissipation	P_{in}	75 mW			
Output	Load voltage (peak AC)	V_L	80 V	200 V	400 V	
	Continuous load current	I_L	0.12 A (0.16 A)	0.05 A (0.07 A)	0.04 A (0.05 A)	Peak AC, DC (): in case of using only 1 channel
	Peak load current	I_{peak}	0.36 A	0.15 A	0.12 A	A connection: 100 ms (1 shot), $V_L = DC$
	Power dissipation	P_{out}	800 mW			
Total power dissipation	P_T	850 mW				
I/O isolation voltage	V_{iso}	1,500 V AC				
Temperature limits	Operating	T_{opr}	-40°C to +85°C -40°F to +185°F			Non-condensing at low temperatures
	Storage	T_{stg}	-40°C to +100°C -40°F to +212°F			

2. Electrical characteristics (Ambient temperature: 25°C 77°F)

Item			Symbol	AQW225N(A)	AQW227N(A)	AQW224N(A)	Remarks
Input	LED operate current	Typical	I _{Fon}	0.9 mA			I _L = Max.
		Maximum		3.0 mA			
	LED turn off current	Minimum	I _{Foff}	0.4 mA			I _L = Max.
		Typical		0.8 mA			
LED dropout voltage	Typical	V _F	1.14 V (1.25 V at I _F = 50 mA)			I _F = 5 mA	
	Maximum		1.5 V				
Output	On resistance	Typical	R _{on}	7	30	70	I _F = 5 mA I _L = Max. Within 1 s on time
		Maximum		10	50	100	
	Output capacitance	Typical	C _{out}	10 pF			I _F = 0 V _B = 0 f = 1 MHz
		Maximum		15 pF			
Off state leakage current	Maximum	I _{leak}	10 nA			I _F = 0 V _L = Max.	
Transfer characteristics	Switching speed	Turn on time*	Typical	T _{on}	0.20 ms		I _F = 5 mA I _L = Max.
			Maximum		0.5 ms		
		Turn off time*	Typical	T _{off}	0.08 ms		I _F = 5 mA I _L = Max.
			Maximum		0.2 ms		
	I/O capacitance	Typical	C _{iso}	0.8 pF		f = 1 MHz V _B = 0	
		Maximum		1.5 pF			
Initial I/O isolation resistance	Minimum	R _{iso}	1,000 M		500 V DC		

Note: Recommendable LED forward current I_F = 5mA.

*Turn on/Turn off time

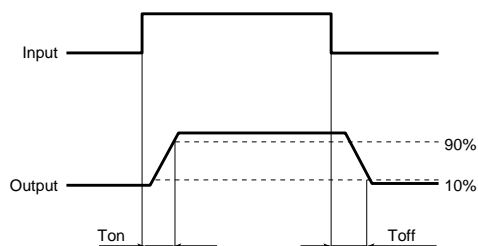


- For Dimensions, see Page 440.
- For Schematic and Wiring Diagrams, see Page 445.
- For Cautions for Use, see Page 449.

REFERENCE DATA


1. Load current vs. ambient temperature characteristics

Allowable ambient temperature: -40°C to +85°C
-40°F to +185°F

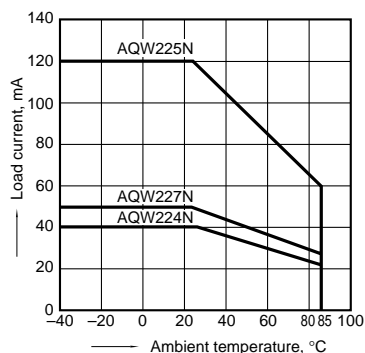


2.-(1) On resistance vs. ambient temperature characteristics

Measured portion: between terminals 5 and 6, 7 and 8; LED current: 5 mA; Load voltage: Max. (DC); Continuous load current: Max. (DC)



2.-(2) On resistance vs. ambient temperature characteristics


Measured portion: between terminals 5 and 6, 7 and 8; LED current: 5 mA; Load voltage: Max. (DC); Continuous load current: Max. (DC)

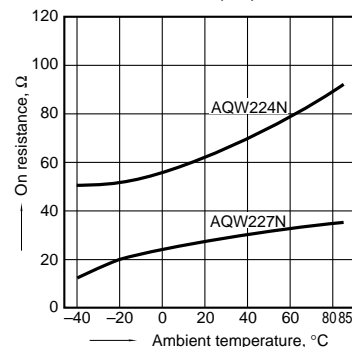

AQW220N


3. Turn on time vs. ambient temperature characteristics

LED current: 5 mA; Load voltage: Max. (DC);
Continuous load current: Max. (DC)

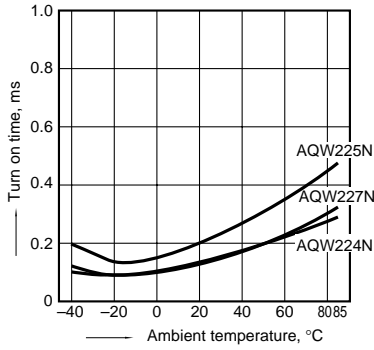


4. Turn off time vs. ambient temperature characteristics

LED current: 5 mA; Load voltage: Max. (DC);
Continuous load current: Max. (DC)

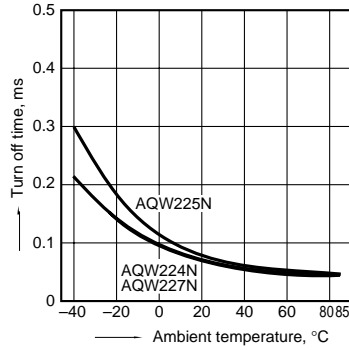


5. LED operate current vs. ambient temperature characteristics

Load voltage: Max. (DC);
Continuous load current: Max. (DC)

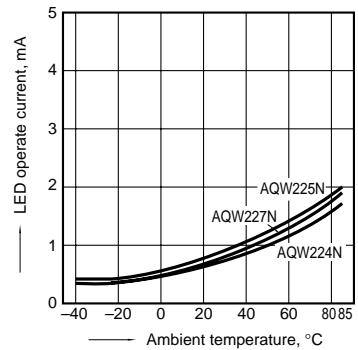


6. LED turn off current vs. ambient temperature characteristics

Load voltage: Max. (DC);
Continuous load current: Max. (DC)

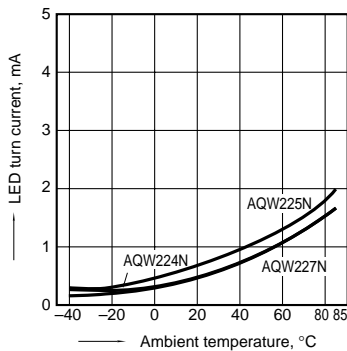


7. LED dropout voltage vs. ambient temperature characteristics

Sample: All types;
LED current: 5 to 50 mA

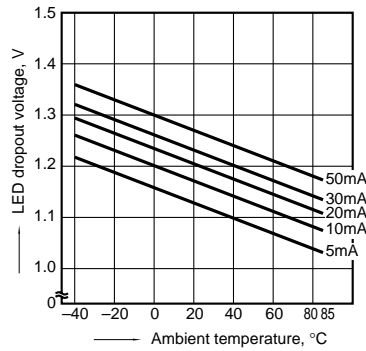


8. Voltage vs. current characteristics of output at MOS portion

Measured portion: between terminals 5 and 6,
7 and 8; Ambient temperature: 25°C 77°F




9. Off state leakage current

Measured portion: between terminals 5 and 6,
7 and 8; Ambient temperature: 25°C 77°F

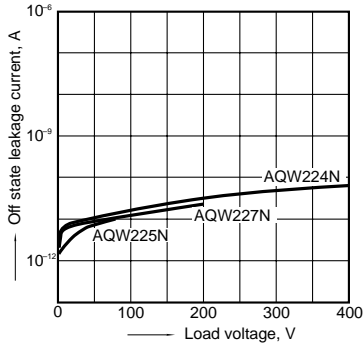


10. LED forward current vs. turn on time characteristics

Measured portion: between terminals 5 and 6,
7 and 8; Load voltage: Max. (DC);
Continuous load current: Max. (DC);
Ambient temperature: 25°C 77°F

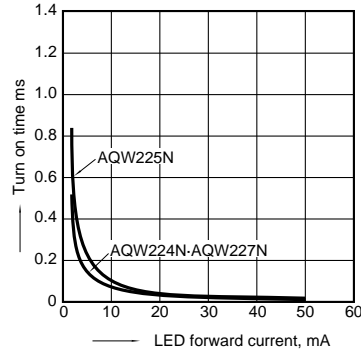


11. LED forward current vs. turn off time characteristics

Measured portion: between terminals 5 and 6,
7 and 8; Load voltage: Max. (DC);
Continuous load current: Max. (DC);
Ambient temperature: 25°C 77°F

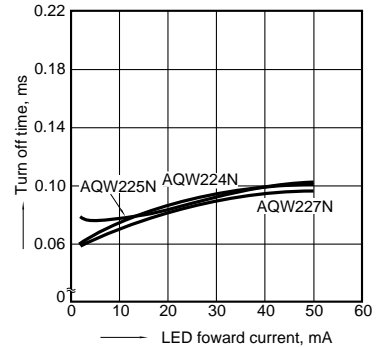


12. Applied voltage vs. output capacitance characteristics

Measured portion: between terminals 5 and 6,
7 and 8; Frequency: 1 MHz, 30 mVrms;
Ambient temperature: 25°C 77°F



13. Isolation characteristics (50 W impedance)

Measured portion: between terminals 5 and 6,
7 and 8; Ambient temperature: 25°C 77°F

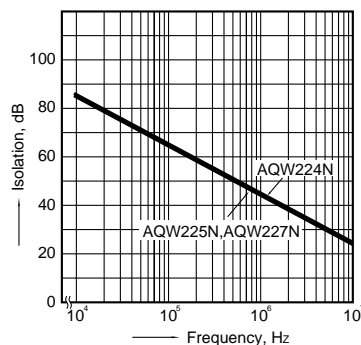

14. Insertion loss characteristics (50 W impedance)

Measured portion: between terminals 5 and 6,
7 and 8; Ambient temperature: 25°C 77°F

